


Technical Data Sheet (Version 1. 2025)

SF Chemical Stud

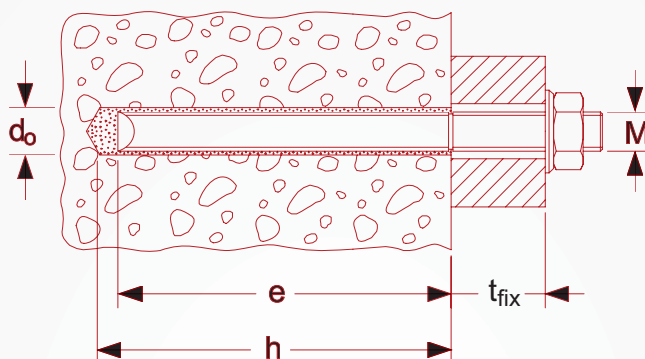

DESCRIPTION

Threaded rod for use with Injection mortar or 2 component resin capsule.
The resin adheres to the entire surface of the threaded rod, bonding it to the wall of the drilled hole.
For pre-positioned installation.
Carbon steel grade 5.8.
Threaded rods are supplied with an easy-to-use hexagonal installation drive and a setting tool included in each package.
Thread diameter 8 to 30 mm.

Suitable for:

Non-cracked concrete
≥ C12/15.
Natural stone with dense structure.

For fixing of:

Steel and wooden constructions.

Art. No	Type	Dia	Total Length	Drill	Min. embedment depth (mm)	Steel Grade	Quantity Per Box
	(mm)	(mm)	(mm)	(mm)			
SFCS14101	8x110	8	110	10	80	5.8	10
SFCS14102	10x130	10	130	12	90	5.8	10
SFCS14103	12x160	12	160	14	110	5.8	10
SFCS14104	16x190	16	190	18	125	5.8	10
SFCS14105	20x260	20	260	25	170	5.8	10
SFCS14106	24x300	24	300	28	210	5.8	5
SFCS14107	30x380	30	380	35	280	5.8	5