



Technical Data Sheet (Version 1. 2025)

SF Rubber Clamps

TECHNICAL DATA

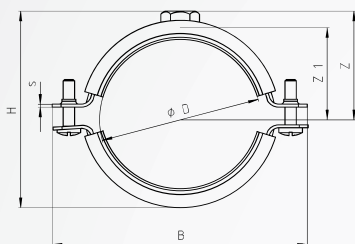

Drainage pipe assembly


ADVANTAGES/BENEFITS

- Simple installation due to large opening angle.
- Locking screw secured against loss.
- Combination connecting thread for cost-effective warehousing and flexibility at the construction site.

PROPERTIES

- Material:** Steel
- Zinc plating:** Electro zinc plated 5 - 9 μm
- Standard:** comply with ASTM B633 SC1
- Also available in SC3 on special request.
- Also available in dacromet finish 8,6 μm
- Connecting nut:** resistance welded, M8, SW 13
- Locking screw:** flat head screw with combination recessed head
- Sound Insulation inserts:** Material EPDM: Chlorine fire, Silicon fire
- Sound insulation:** acc. to DIN 4109
- Temperature range:** -40 °C to +100 °C
- Hardness:** 60 $\pm$ 5° Shore

INSTALLATION

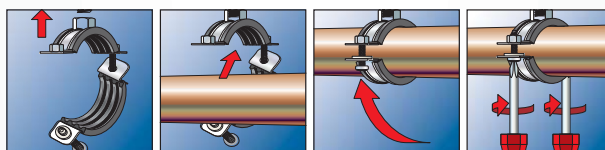

Art.No.	Size	Clamping Range	Threaded Dia	Screw Size	S x B	Recommended load	Design load	Quantity Per Box
	(inch)	(mm)	(mm)	(mm)	(mm)	(KN)	(KN)	
SFRC24101	3/8"	15-19	M8 / M10	5x20	1.5x20	0.93	1.3	100
SFRC24102	1/2"	20-25	M8 / M10	5x20	1.5x20	0.93	1.3	100
SFRC24103	3/4"	26-30	M8 / M10	5x20	1.5x20	0.93	1.3	100
SFRC24104	1"	32-36	M8 / M10	5x20	1.5x20	0.93	1.3	100
SFRC24105	1-1/4"	38-43	M8 / M10	5x20	1.5x20	0.93	1.3	100
SFRC24106	1-1/2"	47-51	M8 / M10	5x20	1.5x20	0.93	1.3	100
SFRC24107	2"	60-64	M8 / M10	5x20	1.5x20	0.93	1.3	50
SFRC24108	2-1/2"	75-80	M8 / M10	5x20	1.5x20	1.76	2.4	50
SFRC24109	3"	87-92	M8 / M10	5x20	1.5x20	1.76	2.4	50
SFRC24110	4"	113-118	M8 / M10	5x20	1.5x20	2.4	3.4	20
SFRC24111	5"	138-142	M8 / M10	5x20	1.5x20	2.4	3.4	20
SFRC24112	6"	159-166	M8 / M10	5x20	1.5x20	2.4	3.4	20
SFRC24113	8"	215-220	M8 / M10	5x20	1.5x20	2.7	3.8	10
SFRC24114	10"	249-253	M8 / M10	5x20	1.5x20	2.7	3.8	10
SFRC24115	12"	300-305	M8 / M10	5x20	1.5x20	2.7	3.8	10